
Tec 6100 hotmelt applicator
Technical Datasheet

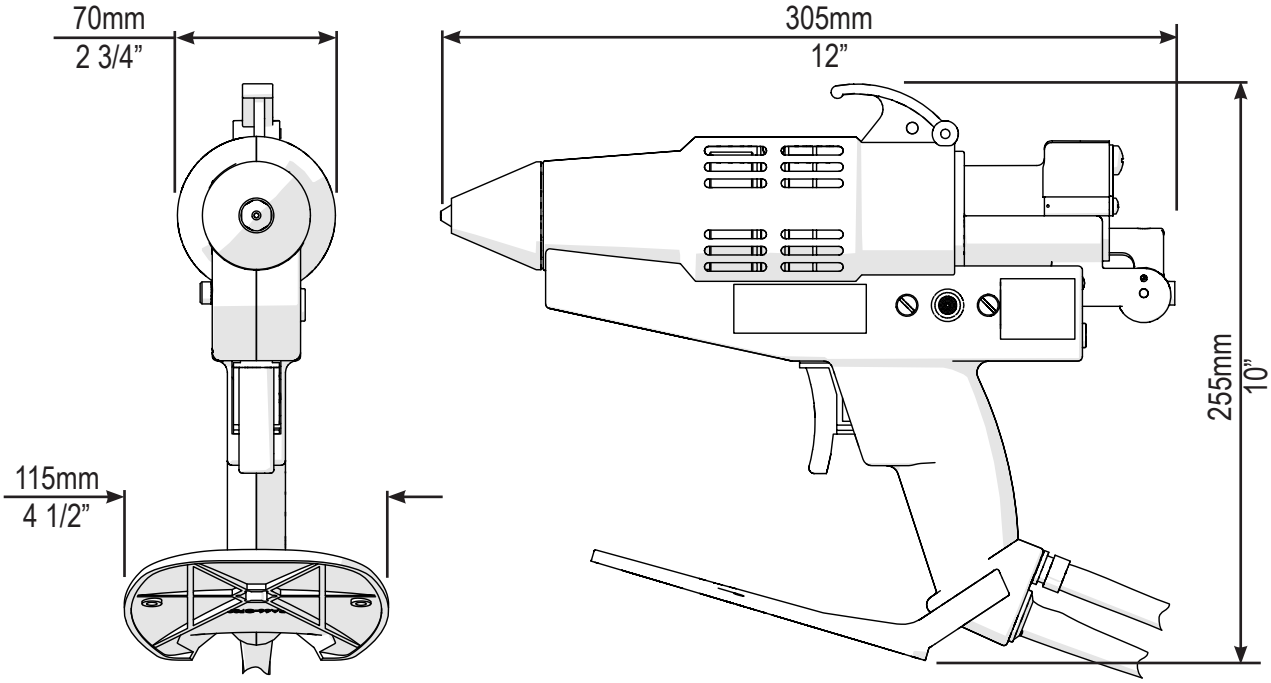

	Tec 6100
Type	Pneumatic bead glue gun
Glue size	43mm (1¾”) glue stick
Melt rate	4.1kg (9lb) / hr
Voltage	120V & 230V
Wattage	500W
AC Hz	AC 50-60Hz
Heater	Cartridge
Temperate control	Interchangeable thermostat
Temperature (hotmelt)	195° (380°F), 215° (419°F)
Temperature (lowmelt)	130° (265°F)
Weight	1.4kg (3lb)
Power cable	3m (10’) permanently attached flexible cable with plug
Plug variants	UK, Euro, USA, ZA, AU, 110V
Pneumatic requirements	Max 7 bar (100psi) 14 l/m (0.5cfm)
Packaging	Cardboard box - 370 x 310 x 100mm (2.5kg / 5.5lb) 5 per outer carton - 340 x 380 x 540mm (13.5kg / 30lb)
Approvals	UKCA, CE
Warranty	12 months from date of purchase

Power Adhesives Limited
1 Lords Way, Basildon, Essex, SS13 1TN, England
Telephone: +44 (0)1268 885800 Fax: +44 (0)1268 885810
E-mail: sales@poweradhesives.com Website: www.poweradhesives.com

BRITISH ADHESIVES & SEALANTS ASSOCIATION
ISO 9001 ISO 14001 ISO 45001 CERTIFIED